


TRAFFIC POLE W/ BRACKET

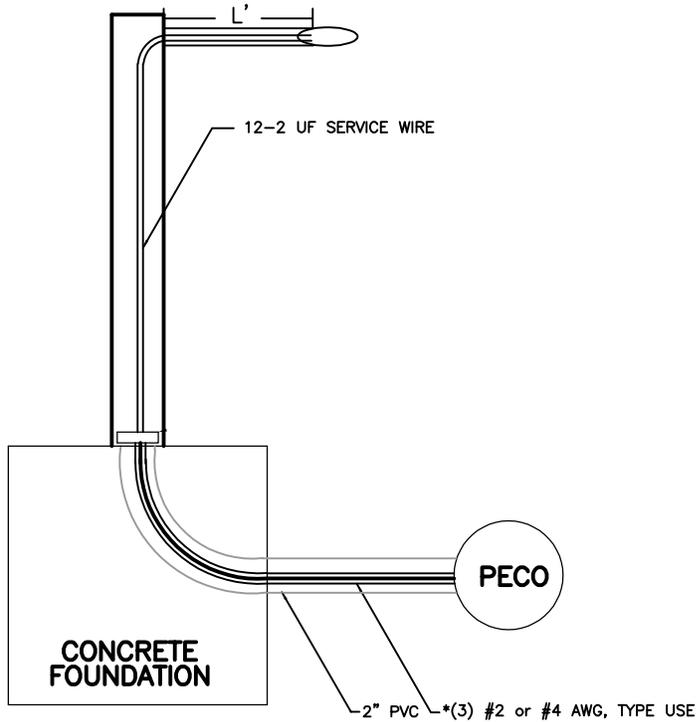

ROADWAY WIDTH	BRACKET LENGTH (L')
< 70'	6'
> 70'	12'

**NOTES:**


\* 3 WIRES ARE QUANTIFIED SEPARATELY, USE WIRE IS USED FOR UNDERGROUND, WET CONDITIONS. #2 AWG IS USED FOR POLES IN SERIES AND #4 AWG IS USED FOR INDIVIDUAL TAPS.

\* 3 WIRES ARE QUANTIFIED SEPARATELY, USE WIRE IS USED FOR UNDERGROUND, WET CONDITIONS. #2 AWG IS USED FOR POLES IN SERIES AND #4 AWG IS USED FOR INDIVIDUAL TAPS.

UTILITY MANHOLE MODIFICATION REQUIRED

UNDERGROUND CONNECTIONS MUST BE PERFORMED BY PECO;  
 \$800 FOR MANHOLE, \$200 FOR DIRECT BURY  
 (PECO also includes a cost for engineering)

DIRECT BURY TAP

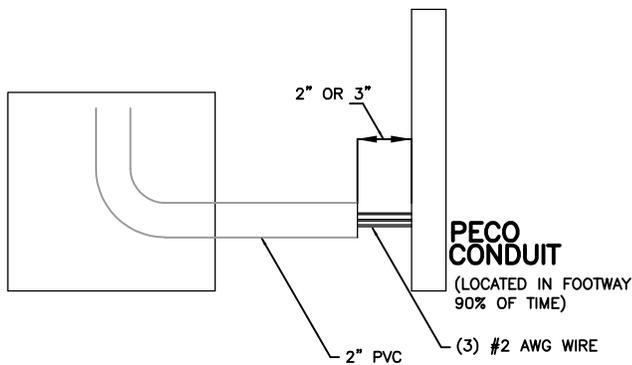

CITY OF PHILADELPHIA

DEPARTMENT OF STREETS

D-POLE TAP

DATE	11/07/05	SHEET 1 OF 1	
REVISED	3/01/15		
APPROVED: V.L.F			

TE0703